

TM-OC150

15.0-inch PCAP touch Open-frame Industrial Monitor

Specification

V2.0

Key features:

- 15.0" TFT LCD, LED backlit, Resolution 1024 x 768;
- Projective capacitive multi-point (10-points) touch;
- Aluminum-magnesium alloy, anodic treatment;
- Multi DVI+VGA Signal input;
- Industrial temp. -20°C~+70 °C;
- Open-frame mounting, support VESA mounting;
- Optional No-touch function, with Glass.



Brief Introduction

TAICENN TM-OC150 series is an enhanced stability and reliability industrial 15.0-inch Open Frame mounting Touch Monitor product. The design uses a multi-point (10- points) projective capacitive touch screen.


The TM-OC150 uses full-sealed box construction, and its front panel complies NEMA / IP65 waterproof and dust-proof standard, to prevent installation in the control cabinet because of the scene splashing water droplets and water vapor into the host and thus affect equipment operation; high-strength steel box structure, so that it can adapt to the harsh industrial site work environment, the most suitable for commercial automation, industrial automation, vending machine & system, and other industrial applications.

Technical Data

Basic Parameter	
Button	OSD Button in back panel
Overall Dimension	355.5 x 279.4 x 55
Hole Dimension	351.5 x 292.9
Structure	Front Panel: Aluminum-magnesium alloy, anodic treatment Back panel: SGCC
Mounting	Open frame Mounting (Support VESA)
Display port	Support DVI + VGA
Voltage Input	12V (Optional 24V)
Power Consumption	20W
New weight	3 KG
LCD	
Size/Type	15.0" TFT LCD
Resolution	1024 * 768
Backlit	WLED
Brightness	400 (cd/m ²)
Backlit MTBF	30 000 hours
Display area	305.0 x 229.0
Contrast ratio	800: 1
Viewing angle	85/85/80/80 (Typ.)
TOUCH	
Type	Projective capacitive (P-cap.)
Interface	USB (Optional RS232)
Transparency	>90±3%
Touch points	10 Points

Durability	>100 000 000 times
Surface hardness	Mohs 6H
Operating force	≤10g
Environmental	
Working temperature	-20°C~+70 °C
Storage temperature	-30°C~+80 °C
Water Proof	IP65 rating in front panel
Relative humidity	10~95%@10°C (No condensation)
Vibration	50~500Hz,1.5G,0.15mm peak to peak
Shock	10G/peak (11ms sec)
Certification	CE/ROHS/FCC

Dimension

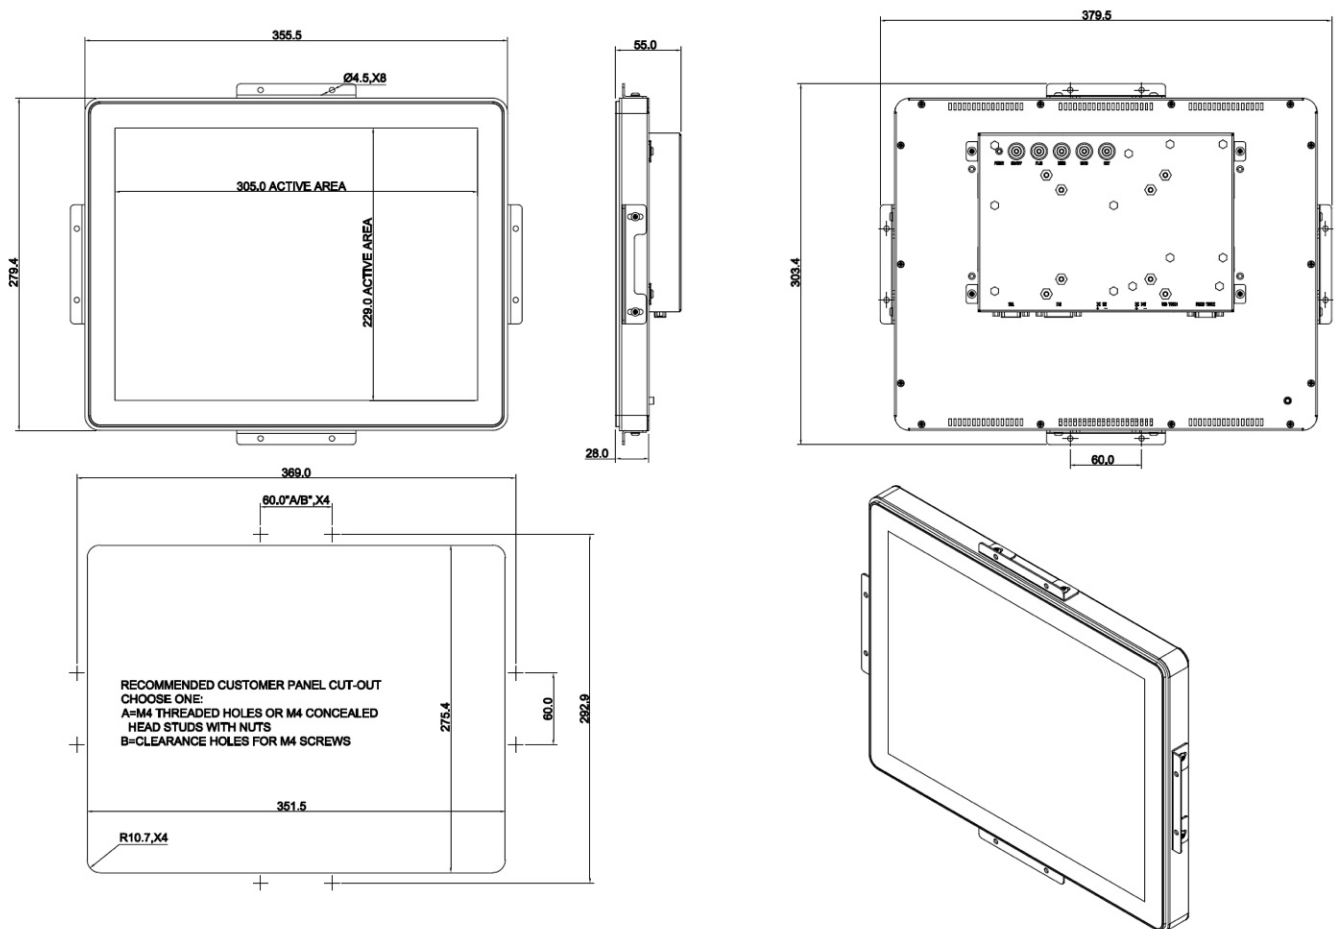

Ordering Information

Ordering Part no.	Description
TM-OC150	15.0" TFT LCD 1024*768, P-cap. Touch, 1*DVI, 1*VGA, DC 12V, 40W power adapter
TM-OC150W	15.0" TFT LCD 1024*768/P-cap. Touch, 1*DVI, 1*VGA, DC 24V
TM-OG150	15.0" TFT LCD 1024*768, Tempered glass (No touch), 1*DVI, 1*VGA, DC 12V, 40W power adapter
TM-OG150W	15.0" TFT LCD 1024*768, Tempered glass (No touch), 1*DVI, 1*VGA, DC 24V

TAICENN Technology

*TAICENN, is a leading global **solution provider** of Embedded Box IPC, Touch panel IPC and industrial monitor, which are designed specifically for systems and applications that require excellent performance, high-level reliability and stability, long supply period and supports.*

The information in this specification is subject to change without notice

All parts of TAICENN Technology documentation are protected by copyright law and all rights are reserved. This documentation may not, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form without prior consent, in writing, from TAICENN Technology.