

TAICENN

TPC-DRM215A

21.5" widescreen Intel Apollo lake J3455/J3355 Slim Resistive Touch panel PC

Specification

Version 2.1

Key features:

- 21.5" Full HD, widescreen, Projective capacitive multi-point touch;
- Intel Celeron J3455/J3355 processor;
- Impact & Slim, fan-less design, Finned heat sink;
- 2 * Intel GLAN, 2* COM, 4* USB, 1* HDMI;
- Operating temperature range, support 0°C~+60 °C
- **Front surface PET film laminated, true flat front panel;**
- **Optional** 10-points multi points projective capacitive touch.



Brief Introduction

TAICENN TPC-DRM215A series is a low power-consumption, Fan-less designed, enhanced stability and reliability industrial 21.5-inch Touch Panel PC product. It adapts Intel Celeron J3455 or J3355 processor. TPC-DRM215A series storage can support 2.5" SATA and mSATA interface, HDD or SSD. The design uses a high-temp. five-wires resistive touch, together with a specific PET film laminated to be true flat design. And it can fulfill front panel NEMA/IP65 dust-proof and water-proof standards.


The TPC-DRM215A uses full-sealed box construction, and it can prevent dust from entering the device system, is compatible with WIN10, Linux OS, and it also has a good compatibility with customized applications and software programs.

Technical Data

System		
BIOS	SPI AMI EFI BIOS	
CPU	Intel Celeron J3455	Intel Celeron J3355
CPU Ghz	Quad-core 1.5 Ghz, Burst to 2.3Ghz, TDP 10W	Dual-cores, 2.0Ghz, Burst to 2.5Ghz, TDP 10W
Memory	DDR3L, Max. up to 8GB	
Storage	1* 2.5" SATA + 1* mSATA	
Display	Support 1*HDMI output	
Watch dog	Programmable 1~255 seconds	
System	Win 7, Win8, Win embedded, WIN10, Linux, Unix	
I/O		
Network	2* Intel I211AT	
USB	3* USB 3.0 + 1* USB 2.0	
COM	2* RS232 (Surge and electrostatic protection) Optional with 1* RS485	
Audio	Realtek ACL 269 Audio controller	
Speaker	Optional 2x 2W (Default not included)	
Expansion	WIFI/3G/4G (1* Mini-PCIe slot)	
Others	1x 2 pins Phoenix terminal, power switch	
LCD		
Size/Type	21.5" TFT LCD	
Resolution	1920 * 1080 Full HD	
Brightness	250 (cd/m ²)	
Brightness MTBF	WLED, 30 000 hours	
Display area	476.64 x 268.11	

Viewing angle	89/89/89/89 (Typ.)
TOUCH	
Type	High-temp. precision 5 wires Resistive touch
Interface	USB (Optional RS232)
Transmittance	>80±3%
Resolution	4096 x 4096
Click life	250g/ 35 000 000 times
Response time	<15ms
Operating force	≤50g
Surface hardness	>Mohs 3H
Structure	
Front Panel	Magnesium-aluminum alloy, Anodizing treatment
Back Panel	SGCC Galvanized plate sheet, Sand-blasting
Cooling System	Finned aluminum heat-sinks, fan-less design
IP rating	IP65 front panel
Mounting	Panel mount, VESA 75/100
Product Dimension	527 x 318.7 x 56.5 (mm)
Cut-out Dimension	516 x 308
Net weight	7.10 KG
Power and Environmental	
Voltage Input	DC 12V (Over-current, Over-voltage and reverse polarity protection)
Power Consumption	About 40W
Working temperature	0°C~+60 °C
Storage temperature	-20°C~+70 °C
Relative humidity	10~95%@10°C (No condensation)
Vibration	50~500Hz,1.5G,0.15mm peak to peak
Shock	10G/peak (11ms sec)

Dimension

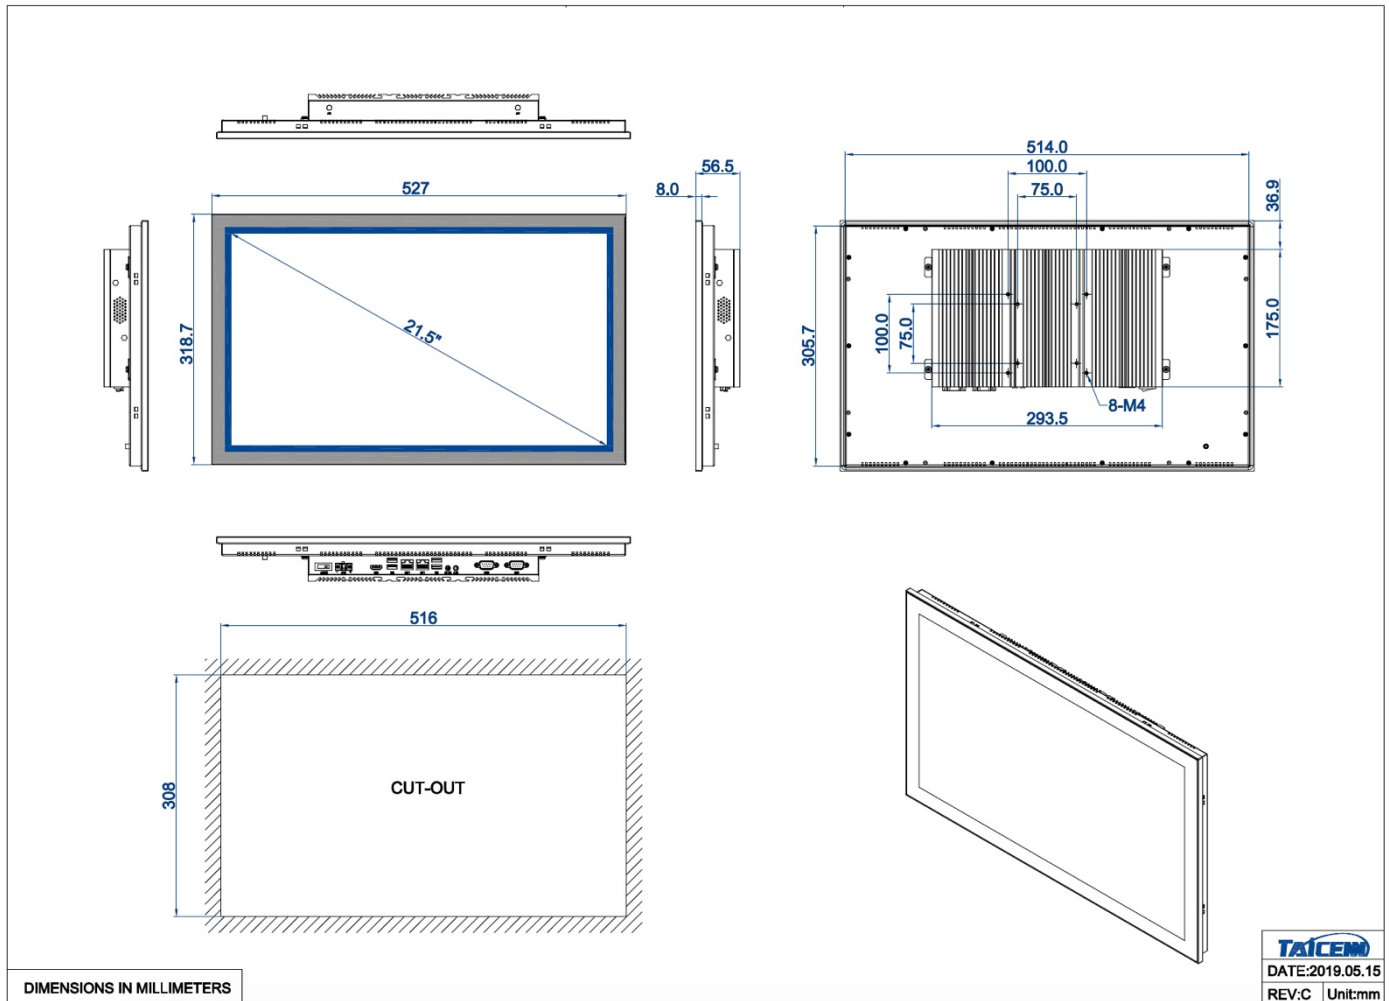

DATE:2019.05.15

 REV:C Unit:mm

Ordering Information

TPC-DRM215A1	21.5"/1920*1080/ Resistive Touch/ J3455/2*GLAN/ 2*RS232/ 4* USB/ 1*HDMI, DC 12V Adapter
TPC-DRM215A2	21.5"/1920*1080/ Resistive Touch/ J3355/2*GLAN/ 2*RS232/ 4* USB/ 1*HDMI, DC 12V Adapter
Memory	SO-DDR3L: 2G/4G/8G
Storage	SSD: 32GB/64GB/128GB/256GB/512GB/1TB
WiFi	IEEE 802.11n 150Mbps
3G/4G	All network 3G/4G Module
Speaker	2*2w speaker

Revision History

Date	Revision	Description
2018-01-03	V1.0	Initially release
2019-05-15	V2.0	Dimension layout update (Panel mount hole update) New Images update
2019-06-30	V2.1	CPU description update Add revision history content

TAICENN Technology

*TAICENN, is a leading global **solution provider** of Embedded Box IPC, Touch panel IPC and industrial monitor, which are designed specifically for systems and applications that require excellent performance, high-level reliability and stability, long supply period and supports.*

The information in this specification is subject to change without notice

All parts of TAICENN Technology documentation are protected by copyright law and all rights are reserved. This documentation may not, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form without prior consent, in writing, from TAICENN Technology.